

# MidMade

## WALL/INSPECTION HATCHES

Our insulated hatches are constructed in order to eliminate thermal bridges and to give maximum insulation and sealing. Delivered ready to assemble.

The hatches can be hung either to the right or left. With the exception of LUX C1010 and SAN60, EI30, the hatches can also be used in ceilings as inspection hatches without a ladder.

### General areas of usage

In houses and leisure houses, for example, in eave space in 1½ storey houses or in walls in non-insulated space.



**LUX B1010**

### LUX – something extra in both function and appearance

Very easy to assemble, includes frame with architrave and pre-drilled holes for assembly.

The elegant architrave and the hatch form combine with the white surface treatment to ensure the 'invisibility' of the hatch when in place.

#### Two styles available

**B1010/1020:** Give maximum sealing and insulation. Fitted with espagnolette lock, very easy to manoeuvre with opening handle.

**C1010/1020:** Neither insulated nor sealed. Fitted with self-closing hinge plus a small nob for opening and closing. No lock supplied.

#### Areas of usage

Between insulated spaces



**SAN70**



**SAN60, EI30**



### SAN – very flexible in both style and size

The hatch door is built on a wooden frame constructed of hard fibreboard sides and filled with insulation.

Available in three styles: SAN70 (standard), SAN60, EI30 (fire rated) and SAN30 rustic, all in two standard sizes.

All are delivered unvarnished. Alternative measurements (not SAN rustic) and finished paintwork available on order.

#### SAN70

Used where a greater degree of insulation is needed. The smaller sizes are equipped with a recessed sealing lock while the larger sizes are equipped with an espagnolette lock. Both are manoeuvrable with an opening handle.

#### SAN60

**EI30** Fire resistance up to 30 mins from both sides according to Item Swedish Approval Certificate no.1157/00. Espagnolette locking. **Note:** The fire-rating applies to walls only.

#### Areas of usage

Attic storage areas, for example, support walls and other fire partition walls.

#### SAN30 rustic

Has a rustic character. A mirror hatch made of pine is fitted onto the main hatch. Recessed sealing lock. **Note:** not available in alternative measurements.

#### Areas of usage

Suitable in combination with panelling.




**SAN30 rustic**

Product	Size of casing (mm)	Insulation (mm)	Insulation Factor	Sealing	Weight (kg)	Remarks
LUX B1010	570 x 800	50 polystyrene	0,78	Yes	10	
LUX B1020	570 x 1100	50 polystyrene	0,78	Yes	13	
LUX C1010	570 x 800	uninsulated	–	No	9	<i>only wall</i>
LUX C1020	570 x 1100	uninsulated	–	No	11	<i>only wall</i>
SAN70	540 x 790	70 polystyrene	0,54	Yes	8	
SAN70	580 x 1100	70 polystyrene	0,54	Yes	12	
SAN30 rustic	540 x 790	30 polystyrene	1,00	Yes	9	
SAN30 rustic	540 x 890	30 polystyrene	1,00	Yes	10	
SAN60, fire-rate EI30	540 x 790	60 rock wool	1,00	Yes	10	<i>only wall</i>
SAN60, fire-rate EI30	580 x 1100	60 rock wool	1,00	Yes	17	<i>only wall</i>



#### STOCKIST

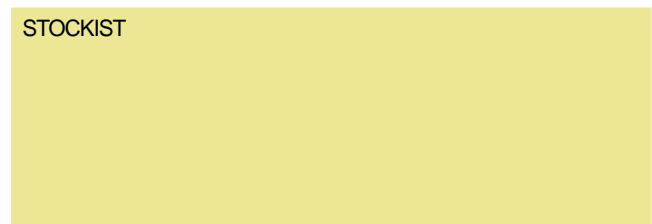

*We apply Quality system ISO 9001  
The manufacturer reserves the right to make technical alterations!  
Midmade is manufactured and promoted by*

#### **SAMHALL MIDLAND AB**

Box 7020, S-850 07 Sundsvall, Sweden

TEL +46 60 16 82 40 FAX +46 60 16 82 50

E-MAIL [info@midmade.com](mailto:info@midmade.com) • [www.midmade.com](http://www.midmade.com)

