

MidMade LUX

**Our most luxurious model.
For those who wants that
something extra, both in
function and appearance.**

Delivered fully assembled and ready to fit with detailed assembly instructions with pictures. Constructed for easy installation with architrave frame, pre-drilled assembly holes and fitting springs at the front and at the back. Gas piston balanced trap door with an espagnolette lock with two bolts, very easy to manoeuvre with opening handle. Trap door is sealed to prevent heat loss and draught.

The trap door has an elegant architrave, its surface treated in matt white finish and is effectively insulated with 50 mm insulation.

Two types of folding ladders in 3-parts either in wood or in aluminium. Both fits on to the hatch door when folded and no loft clearance is required.

The included protective pads are to be attached after adjusting the ladder length.



LUX A1220

LUX A1120

Product	Size of casing (mm)	Type of ladder	Ceiling height (mm) standard (highest)	Insulation	Insulation-Factor	Sealing	Weight (kg)
LUX A1120	570 x 1116	wooden 3-part	2650 (-3200)	50 polysterene	0,78	Yes	30
LUX A1220	570 x 1116	alu 3-part	2620 (-3280)	50 polysterene	0,78	Yes	27

Ladder information

it is important that the ladder is adjusted according to the ceiling height, see installation instructions.

Wooden 3-part ladder: When fitted to ceilings lower than 2650 mm, the ladder is shortened according to the installation instruction. When fitted to higher ceilings up to 3200 mm, an extension is added.

Alu 3-part ladder: When fitted to ceilings lower than 2620 mm, the ladder is shortened according to the installation instruction. When fitted to higher ceilings up to 3280 mm, an extension is added.



ALU STEP

GAS PISTON

FITTING SPRING

Accessories




Hand rail
For safer ascent.
In white metal.



Guardrail
Safety in the attic.
Available in wood or aluminium.



Extensions
For extra high ceilings. Available in wood or aluminium.

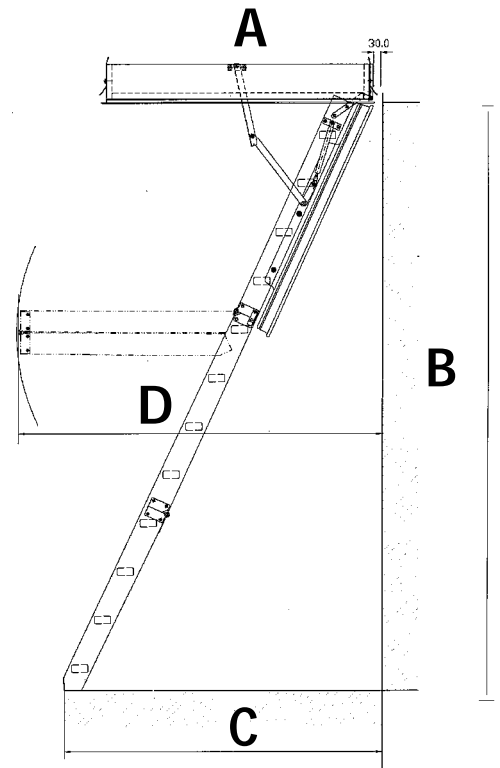

The sketch above and the table below show space requirement in mm for the wooden 3-part ladder. The space requirement depends upon ceiling height.

A: Size of casing	B: Ceiling height	C: Floor clearance	D: Fold clearance
570 X 1116	2400	1271	1531
	2500	1324	1531
	2650	1403	1615

Stockist

We apply Quality System ISO 9001
The manufacturer reserves the right to make technical alterations.
MidMade is manufactured and promoted by